



MS 400 Detector Base





The detector head is installed in the Detector Base MS 400.

The base is suitable for surface-mounted cable feeds as well as for flush-mounted cable feeds, and has separate attachment points for ceiling mount/flush-mounted back boxes. In addition, it fits all standard bore patterns.

The Detector Base made of white ABS plastic (Novodur, color similar to RAL 9010) has a matt finish and seven terminal screws to connect the detector and its features to the fire panel.

Contacts connected to the terminals guarantee a secure electric connection when the detector module is installed. Cables up to 2.5 mm² in diameter can be used.

To protect against unauthorized removal, the detector head can be secured with a variable locking.

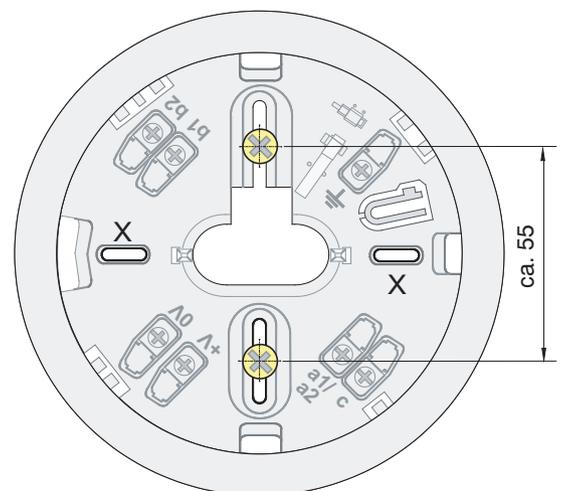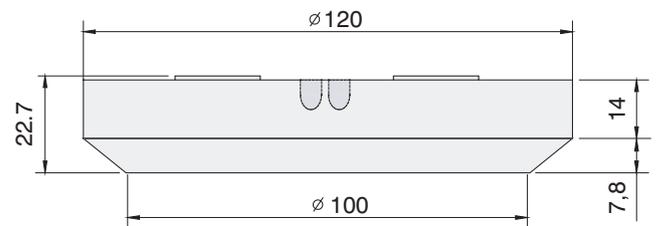

Installation/Configuration Notes

Installation information for 400/420 Series Detector Bases

- The drill holes marked with an "X" may only be used to mount the base to flush-mounted back boxes.
- Keep shielded auxiliary wire as short as possible, and make sure this is insulated.

Technical Specifications

Connections	Power supply (0 V, +V) LSN (a1/a2, b1, b2) C-point Shielding
Housing material	ABS (Novodur)
Housing color	Similar to RAL 9010
Dimensions	Ø 120 x 22.7 mm
Weight	72 g

Ordering Information

MS 400 Detector Base

for surface-mounted and flush-mounted cable feed

MS 400

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by